


SPECIFICATIONS

| Model | | PRO-18 | PRO-18A |
|-------------------------------|---|------------------------------|-------------------|
| Lifting Capacity | | 18,000lbs(8000kg) | 18,000lbs(8000kg) |
| Lifting Time | | 118S | 118S |
| Overall Length(Inc Ramps) | A | 293 1/4" (7449mm) | 292 3/4" (7436mm) |
| Overall Length(No Inc. Ramps) | B | 252 1/4" (6408mm) | 252 1/4" (6408mm) |
| Overall Width | C | 137 1/8" (3482mm) | 137 1/8" (3482mm) |
| Width Between Posts | D | 122 3/8" (3108mm) | 122 3/8" (3108mm) |
| Max. Lifting Height | E | 73 1/2" (1865mm) | 75 3/8" (1915mm) |
| Overall Height | F | 86" (2185mm) | 86" (2185mm) |
| Minimum Height | G | 7 7/8" (200mm) | 9 7/8" (250mm) |
| Max. Underneath Height | H | 66 5/8"(1692mm) | 66 5/8"(1692mm) |
| Drive-Thru Clearance | I | 108 1/4"(2750mm) | 108 1/4"(2750mm) |
| Width Between Runways | J | 51 1/4" (1302mm) | 51 1/4" (1302mm) |
| Outside Edge of Runways | K | 95 1/4"(2418mm) | 95 1/4"(2418mm) |
| Min. Four Wheel Align | L | / | 99 5/8"(2530mm) |
| Max. Four Wheel Align | M | / | 182 5/8"(4640mm) |
| Max. Two Wheel Align | N | / | 209 1/8"(5310mm) |
| Motor | | 3,483lbs(1580kg) | 4,429lbs(2009kg) |
| Gross Weight | | 2.0HP,220V/60Hz,single phase | |

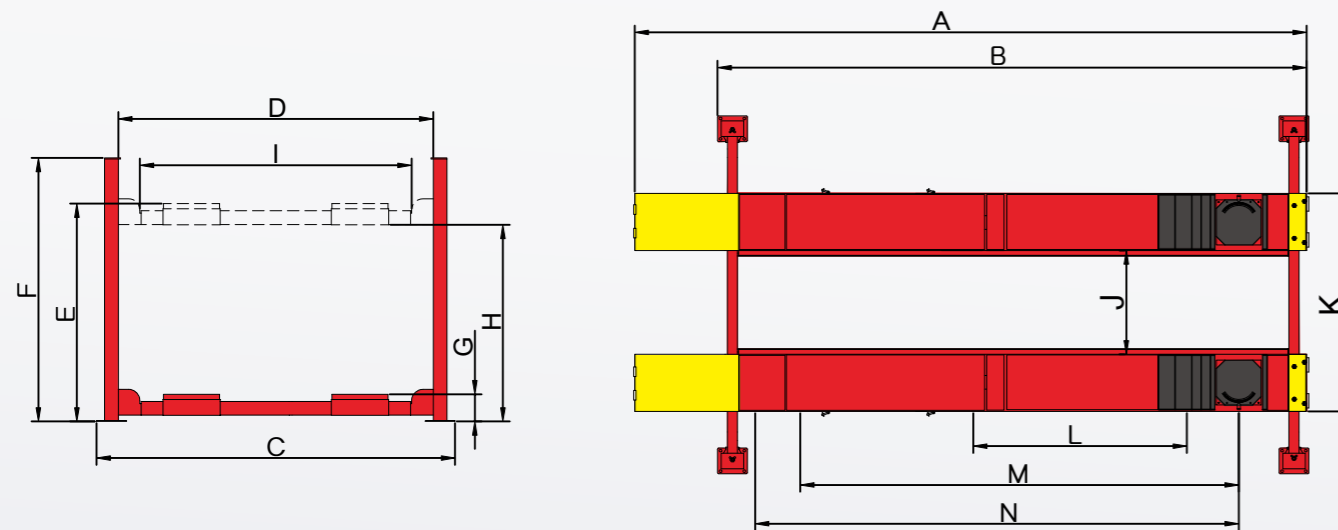

FOUR POST
TRUCK LIFT

AMGO's Heavy Duty Truck Lifts are newly engineered lifts that makes light work out of heavy lifting.




PRO-18

PRO-18A


FOUR POST TRUCK LIFT

AMGO's powerful four-post models provide a 18,000 lbs lifting capacity and feature extra wide runways to accommodate a wide variety of vehicle types. With a double locking safety device, heavy duty design and built to latest manufacturing technology, these lifts are more superior in the competitive lift market.


- ✓ 18,000 lbs lifting capacity;
- ✓ Air-released safety lock for convenient operation and reliability;
- ✓ Mechanical self-locking device and cable-breaking protection;
- ✓ Ø1/2" aircraft quality cable;
- ✓ Adjustable turnplate blocks to fit various wheel bases on the PRO-18A;
- ✓ Integrated rear slip plates for the PRO-18A;
- ✓ Skid proof diamond platform;
- ✓ Hydraulic cylinders are designed to high standards with high quality seals;
- ✓ Strict quality control of cylinders with flow restrictors to keep a constant low speed;
- ✓ The width of platform is 558mm(22") and width between two platforms are 1302mm(51 1/4").
- ✓ Optional Rolling Jacks:
RJ-10A 10,000lbs capacity with pneumatic pump.

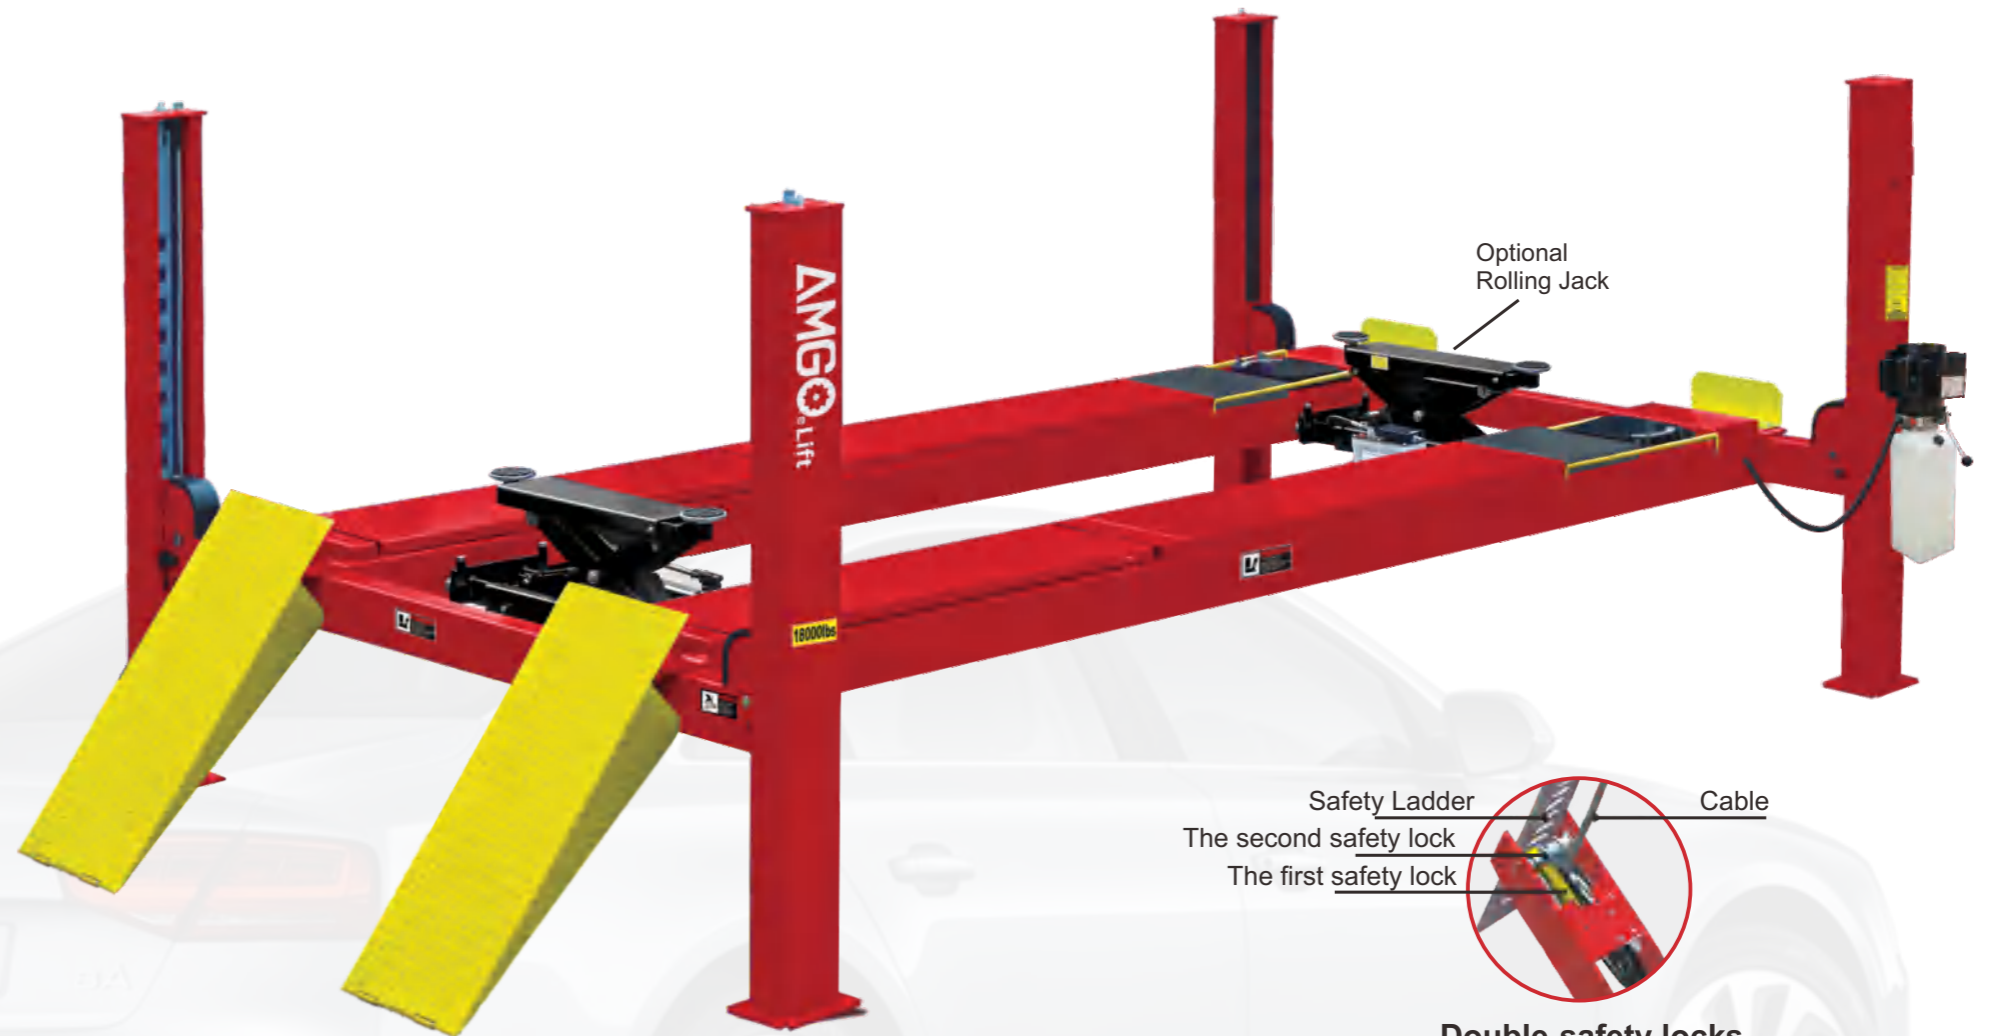

FEATURES

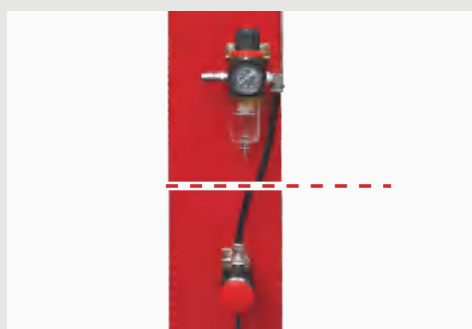

• Air controlled safety device.

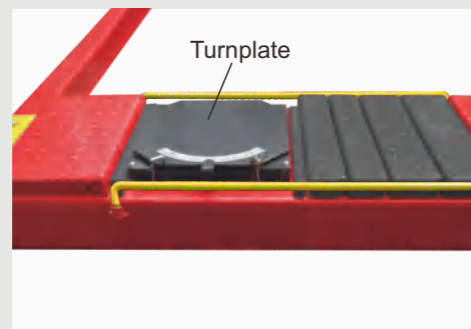


• Adjustable turnplates blocks for the PRO-18A. Optional turnplate. Kits No.: 40101



• New rear-slip ball sets. Optional LED light kits is fitted for every model of AMGO 4-post lifts. LED Kits No.:40103



• Optional airline kit. Easy to install for all models of rolling jacks with pneumatic pump accessories. Kits No.: 40102

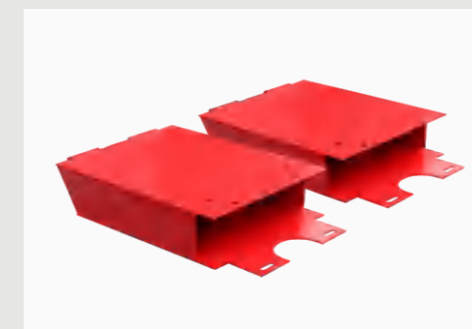

• Optional length extension kits adds an extra 29" (737mm) length to the platform. Kits No.: 41801



• Optional adjustable blocks for alignment 4 post lift. Kits No.: 41803 (used with kits 40801)